

PS2-100 AHRP-07S

Solar Submersible Pump System for 3,5" wells

System Overview

Head max. 40 m Flow rate max. 1.1 m³/h

Technical Data

Controller PS2-100

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)

max. 0.15 kW Power Input voltage max. 50 V Optimum Vmp** > 34 V Motor current max. 6.0 A Efficiency max. 98 % Ambient temp. -40...50 °C Enclosure class IP68

Motor ECDRIVE 100-AHR-S

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304
- · No electronics in the motor

0.15 kW Rated power Efficiency max. 83 % Motor speed 700...2,500 rpm Insulation class IP68 Enclosure class Submersion max. 50 m

Pump End PE AHRP-07S***

- Premium materials: PPS
- Helical rotor pump

Efficiency max. 61 %





Pump Unit PU100 AHRP-07S (Motor, Pump End)

Borehole diameter min. 3,5 in Water temperature max. 50 °C

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature


***Specify temperature range on order





PS2-100 AHRP-07S


Solar Submersible Pump System for 3,5" wells

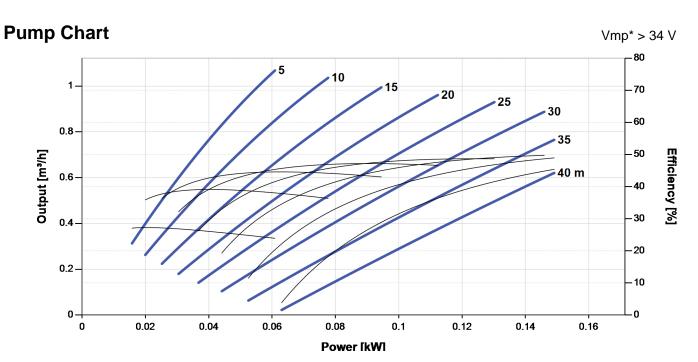

Dimensions and Weights


Controller

H = 115 mm H1 = 101 mm H2 = 11 mm W1 = 122 mm W2 = 100 mm W3 = 80 mm D1 = 29 mm D2 = 20 mm



Pump Unit

A = 455 mm B = 165 mm C = 290 mm D = 88 mm S = 1 in

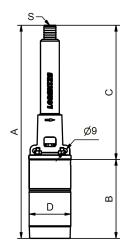

| | Net weight |
|------------|------------|
| Controller | 0.70 kg |
| Pump Unit | 5.4 kg |
| Motor | 4.5 kg |
| Pump End | 0.90 kg |

^{*}Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



